

Voc=457VDC, Isc=7.28AMP
Vmp=376VDC, Imp=6.78AMPS

Voc=457VDC, Isc=7.28AMP
Vmp=376VDC, Imp=6.78AMPS

This Sample Drawing is for illustration purposes only and is not to be used for design or construction. This drawing and its suitability for end use is not implied. The intent is to only illustrate typical minimum information required at time of application to APS. Additional information may be required.

REV.	DESCRIPTION	DATE
------	-------------	------

FAULT CALCS:

F1: AVAIL = 20,955 AIC
d = 5 feet
f = .560
m = 0.641
Isc = 13,432 AIC

F2: AVAIL = 13,432 AIC
d = 5 feet
f = .359
m = 0.736
Isc = 9,883 AIC

F3: AVAIL = 9,883 AIC
d = 5 feet
f = .264
m = 0.791
Isc = 7,818 AIC

F4: AVAIL = 7,818 AIC
d = 5 feet
f = .209
m = 0.827
Isc = 6,467 AIC

* SOURCE: COOPER BUSSMAN SPD
MANUAL, REV 2009. CALCULATIONS IN
ACCORDANCE WITH NEC ART 110.9 &
110.10.

NOTES:

- EQUIPMENT SHALL BE INSTALLED AND LABELED IN ACCORDANCE WITH THE NEC AND ALL APPLICABLE REQUIREMENTS OF THE SERVING ELECTRIC UTILITY COMPANY AND OF THE LOCAL AUTHORITY HAVING JURISDICTION.
- BI-DIRECTIONAL UTILITY METER INSTALLED BY UTILITY COMPANY (AS REQUIRED).
- LABEL BREAKER "PHOTOVOLTAIC ELECTRIC POWER SOURCE" PER NEC 705.12(B)(3), AND "BREAKERS ARE BACKFED" PER NEC 705.12(B)(4) LABEL WITH THE MAXIMUM AC OUTPUT OPERATING CURRENT AND THE OPERATING VOLTAGE PER NEC 690.54.
- LABEL "UTILITY DISCONNECT SWITCH." SWITCH COVER TO BE LOCKED AT ALL TIMES. SWITCH TO BE VISUAL OPEN AND ACCESSIBLE PER UTILITY REQUIREMENTS AND CONFORM TO NEC 705.22.
- LABEL "PHOTOVOLTAIC ARRAY DC DISCONNECT DEVICE" PER NEC 690.13(B). LABEL WITH OPERATING CURRENT, OPERATING VOLTAGE, MAXIMUM SYSTEM VOLTAGE, AND SHORT CIRCUIT CURRENT PER NEC 690.53. SWITCH TO BE LOCKED.
- LABEL "UNI-DIRECTIONAL METER (LINE SIDE VOLTAGE ON TOP LUGS)." METER ENCLOSURE AND SOCKET PROVIDED AND INSTALLED BY CUSTOMER PER APS ESRM. METER, CTs AND TEST SWITCHES PROVIDED BY UTILITY COMPANY WHEN REQUIRED. NOTE 1: CUSTOMER TO SUBMIT SHOP DRAWINGS OF METERING CABINET TO APS METERSHOP FOR APPROVAL. NOTE 2: CT RATED PRODUCTION METERING ENCLOSURES SHALL HAVE THE BUS IDENTIFIED WITH REFERENCE TO THE GENERATION SOURCE SIDE PRIOR TO METERING INSTALLATION WITH A TEMPORARY TAG LABELED "GENERATION SOURCE."
- PROVIDE WARNING SIGN PER NEC 690.13(B) READING "WARNING-ELECTRIC SHOCK HAZARD-DO NOT TOUCH TERMINALS-TERMINALS ON BOTH LINE AND LOAD SIDES MAY BE ENERGIZED IN THE OPEN POSITION."
- LABEL "WARNING INVERTER OUTPUT CONNECTION. DO NOT RELOCATE THIS OVERCURRENT DEVICE" AND LOCATE BREAKER AT OPPOSITE END OF BUS FROM MAIN BREAKER LOCATION PER NEC 705.12(B)(2)(3)(b).
- METALLIC CONDUIT SHALL BE USED WITHIN BUILDING PER NEC 690.31(E).
- LABEL "DEDICATED PHOTOVOLTAIC SYSTEM COMBINER PANEL" AND "DO NOT ADD LOADS TO THIS PANEL."
- GEC TO BE INSTALLED AS REQUIRED BY MANUFACTURER INSTRUCTIONS AND NEC 690.47.
- EQUIPMENT SHALL BE LISTED, TESTED AND MARKED TO WITHSTAND THE AVAILABLE SHORT CIRCUIT CURRENT.
- LABEL "PHOTOVOLTAIC SYSTEM DISCONNECT SWITCH". SWITCH COVER TO BE LOCKED BY CUSTOMER AT ALL TIMES, AND COMPLY WITH NEC 705.22.

NOTE: SYSTEM DESIGNED
IN ACCORDANCE WITH THE
2017 N.E.C.

[SPECIFY MAKE & MODEL #]
2.4 KW UTILITY INTERACTIVE INVERTER
250 - 600 VDC, 120/240VAC, 1Ø, 3W
NEGATIVELY GROUND
(TYPICAL OF 2 INVERTERS)

2- #10 CU THWN-2
1- #10 CU THWN-2 NEUTRAL
1- #10 CU THWN-2 GROUND
1- 1/2" EMT CONDUIT

PHOTOVOLTAIC ARRAY DC
DISCONNECT SWITCH
[SPECIFY MAKE & MODEL #]
3-POLE, 100A, 600VDC

4 - #10 CU THWN-2
2 - #10 CU THWN-2 GROUND
2 - 1/2" EMT CONDUIT

SUB PANEL
[SPECIFY MAKE & MODEL #]
120/240V, 1Ø, 225A

200A
MAIN BREAKER
LOADS

2- #3/0 CU THWN-2
1- #3/0 CU THWN-2 NEUTRAL
1- #6 CU THWN-2 GROUND
1- 2" EMT CONDUIT

JUNCTION BOX

DEDICATED PHOTOVOLTAIC SYSTEM COMBINER PANEL
[SPECIFY MAKE, MODEL #, VOLTAGE AND AMP RATING]

15A/2P
(TYPICAL OF 2)

2- #8 CU THWN-2
1- #8 CU THWN-2 NEUTRAL
1- #10 CU THWN-2 GROUND
1- 1" EMT CONDUIT

PHOTOVOLTAIC SYSTEM
DISCONNECT SWITCH
[SPECIFY MAKE & MODEL
FUSE TYPE]
2-POLE, 30A, 240 VAC

UTILITY DISCONNECT SWITCH
(VISIBLE OPEN, NO FUSES)
[SPECIFY MAKE & MODEL #]
2-POLE, 30A, 240 VAC

UNI-DIRECTIONAL METER
[SPECIFY FORM #, MAKE
& MODEL #]
240V, 100A, RINGTYPE

LINE SIDE (TOP)
TERMINALS
CONNECT PHASE "A"
TO THE LEFT ELEMENT
(TERMINAL) OF THE
METER
[LOOKING AT THE
FRONT OF THE METER]

NOTE: All equipment must be utilized in
accordance with the manufacturer's intended
use and design specifications.

SAMPLE LOAD SIDE TAP ONE - LINE DIAGRAM

1234 South Main Street
Any City, Arizona 85123
Tel: 602-555-5555

APPROVALS	DATE
DRAWN ABC	1-25-17
CHECKED	
ENGINEER	
REV.	

ABC PROJECT #1111-9999

ABC SOLAR COMPANY, INC.


ONE-LINE ELECTRICAL DIAGRAM
4.8 KW AC PHOTOVOLTAIC SYSTEM
333 E. CACTUS BIRD RD.
ANY CITY, AZ 85123

SIZE	DRAWING NO.		
B	0000-0001		
SCALE	NA	REV.	SHEET 1 OF 5

NOTE: UTILITY HAS 24-HR UNRESTRICTED ACCESS TO ALL PHOTOVOLTAIC SYSTEM COMPONENTS LOCATED AND SERVICE ENTRANCE.

NOTE: REFERENCE SECTION 301.15 OF THE APS ESRM FOR ELECTRIC METER SEPARATION BETWEEN WATER AND GAS.

NOTE: WORKSPACE IN FRONT OF AC ELECTRICAL SYSTEM COMPONENTS SHALL BE IN ACCORDANCE WITH APS AND NEC REQUIREMENTS. FOR APS REQUIREMENTS, REFERENCE SECTION 300 OF THE APS ESRM AND SECTION 8.2 OF THE APS INTERCONNECTION REQUIREMENTS.

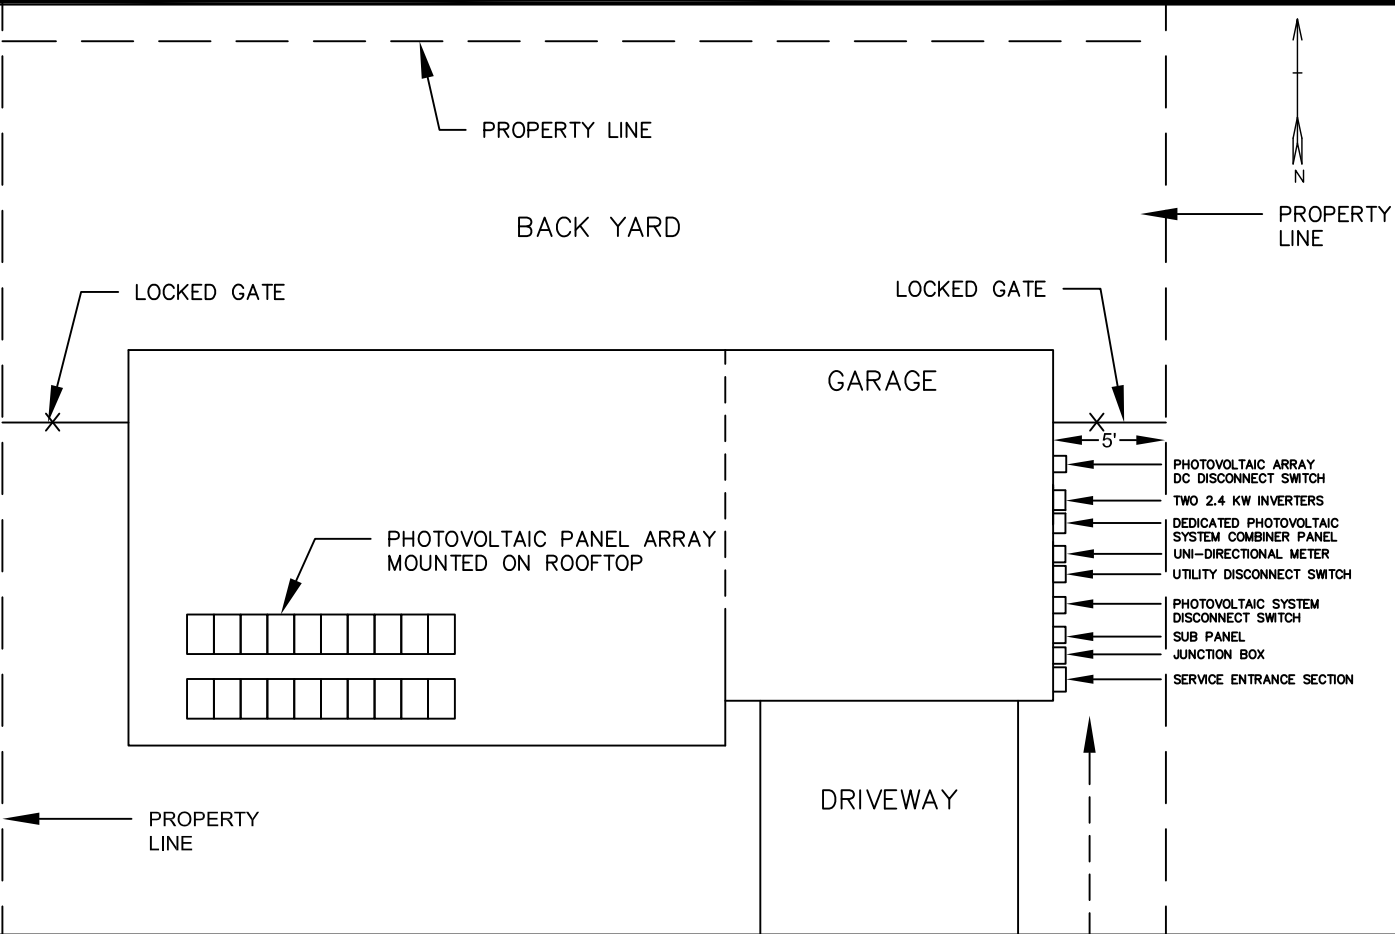


This Sample Drawing is for illustration purposes only and is not to be used for design or construction. This drawing and its suitability for end use is not implied. The intent is only to illustrate typical minimum information required at time of application to APS. Additional information may be required.

E. CACTUS BIRD RD.

APS 24-HR ACCESS

ELEVATION VIEW

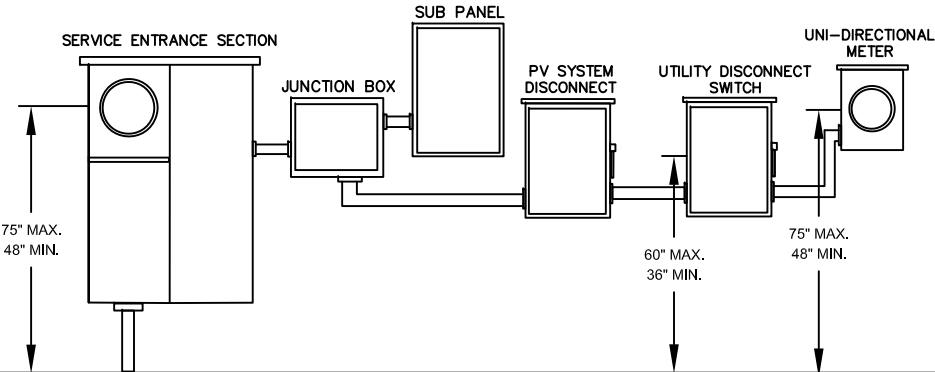

SAMPLE LOAD SIDE TAP SITE PLAN

1234 South Main Street Any City, Arizona 85123 Tel: 602-555-5555		ABC SOLAR COMPANY, INC.	
APPROVALS		DATE	
DRAWN ABC		1-23-17	
CHECKED			
ENGINEER			
REV.			
ABC PROJECT #1111-9999		SIZE B	DRAWING NO. 0000-0005
SCALE NA		REV.	SHEET 5 OF 5