

**FOUR CORNERS POWER PLANT
CLOSURE PLAN §257.102(b)
LINED DECANT WATER POND (LDWP)
FC_SI_ClosPlan_009_20161017**

Closure Plan Contents §257.102(b)(1)

The owner or operator of a CCR unit must prepare a written closure plan that describes the steps necessary to close the CCR unit at any point during the active life of the CCR unit consistent with recognized and generally accepted good engineering practices. The written closure plan must include, at a minimum, the information specified in paragraphs (b)(1)(i) through (vi) of this section.

SITE INFORMATION	
Site Name / Address	Four Corners Power Plant / 691 CR-6100, Fruitland, NM 85416
Owner Name / Address	Arizona Public Service / 400 North 5 th Street, Phoenix, AZ 85004
CCR Unit	Lined Decant Water Pond (LDWP)
Location	36° 41' 00" N, 108° 30' 36" W
Reason for Initiating Closure	Known Final Receipt of Waste
Final Cover Type	Evapotranspiration Cover
Closure Method	Closure by leaving CCR in place
CLOSURE PLAN DESCRIPTION	
(b)(1)(i) – A narrative description of how the CCR unit will be closed in accordance with this section.	<p>The LDWP is an existing coal combustion residual (CCR) impoundment primarily constructed for storage of CCR decant water from the Lined Ash Impoundment (LAI) and is located to the southwest of the Four Corners Power Plant. The LDWP was constructed within the footprint of the old Ash Pond 3, which was filled with varying thicknesses and combinations of fly ash and FGD solids.</p> <p>The LDWP will be closed in conjunction with the adjacent LAI. The two units currently share operations-related features, such as discharge pipes and slopes. In addition, the LDWP, LAI, existing closed Ash Ponds 3 and 6, and the Dry Fly Ash Disposal Area (DFADA) are adjacent to one</p>

another and will share selected closure-related features, including perimeter drainage channels and the type of cover.

The major closure construction activities will be:

- 1) Dewatering
- 2) Re-grading CCR to create acceptable grades for closure,
- 3) Installing the final cover system, and
- 4) Constructing the perimeter drainage channels.

The LDWP will be dewatered to facilitate construction of a final cover system for leaving the CCR in place. The final cover will be constructed over a graded and prepared subgrade. The final cover will be graded to drain and the storm water runoff will be discharged off the LDWP via sheet flow. The flow will be collected in a drainage channel immediately to the south. The drainage channel will discharge into a storm water detention basin. The existing riser and outfall pipes connecting the LAI and LDWP will be grout-abandoned in place.

The concept for grading the LDWP is to cut a 0.5 percent slope from the North Embankment of Ash Pond 3 and grade toward the South Embankment of the LDWP so direct precipitation on top of the LDWP can flow into the drainage channel along the South Embankment toe. As part of the grading plan, fill will be needed to the west of the NTB. The West Embankment of the LAI will be re-graded to a 4H:1V or flatter slope across the east side the LDWP. The two existing HDPE geomembranes will remain in place along the base of the LDWP, but will be removed along the current embankments.

	<p>A system of perimeter drainage channels will provide storm water diversion around the perimeter of the LAI and LDWP footprints.</p> <p>In accordance with §257.102(b)(3), this initial written closure plan will be amended to provide additional details after the final engineering design for the grading and cover system is completed. The initial version of the closure plan reflects the information and planning available at the time of issuance.</p>
<p>(b)(1)(ii) – If closure of the CCR unit will be accomplished through removal of CCR from the CCR unit, a description of the procedures to remove the CCR and decontaminate the CCR unit in accordance with paragraph (c) of this section.</p>	<p>Not applicable. The LDWP will be closed by leaving CCR in place and the cover will be designed in accordance with §257.102(d).</p>
<p>(b)(1)(iii) – If closure of the CCR unit will be accomplished by leaving CCR in place, a description of the final cover system, designed in accordance with paragraph (d) of this section, and the methods and procedures to be used to install the final cover. The closure plan must also discuss how the final cover system will achieve the performance standards specified in paragraph (d) of this section.</p>	<p>Applicable. The LDWP will be closed by leaving CCR in place and cover will be designed in accordance with §257.102(d).</p> <p>The area is in a semi-arid to arid climate with precipitation on the order of 10 inches per year and evaporation losses (pan evaporation rate) on the order of 60 inches per year. Therefore, this environment is appropriate for using a water-balance soil cover system that relies on the net water losing climate to minimize infiltration into the subgrade of the cover.</p> <p>The alternative (“evapotranspiration cap”) final cover-system, designed in accordance with requirements of §257.102(d)(3)(ii), will consist of the following (from bottom to top):</p> <ol style="list-style-type: none"> 1) A minimum of 18 inches of compacted earthen material with a discharge (flux) through the cover material equivalent to a cover system with a single geomembrane: 2) Six inches of soil capable of sustaining

	<p>native plant growth and resisting erosion (erosion layer); and</p> <p>3) Seeded with native vegetation.</p> <p>The existing CCR will be re-graded and earthen or CCR material fill will be placed, as required, to bring the grades to the design slopes. Earthen material for the infiltration layer will be placed, graded, and compacted to meet the specified thickness, density, and permeability. After the erosion layer is placed, the final cover surface will be seeded with native vegetation.</p> <p>Figures 1 through 3 show the general grading concept for the closure of the LDWP. The final cover will have a minimum as-constructed slope of 0.5 percent across the surface of the pond. The outer slopes of the embankments within the final closure configuration of the LDWP will be re-graded to 4H:1V, or flatter where applicable, to improve long-term stability and limit erosion. A system of perimeter drainage channels will provide storm water diversion for run-on flows arriving from the north around the LDWP. A separate system of drainage channels will provide runoff collection and conveyance for the sheet flow from the top of the LDWP to the new detention basin.</p>
<p>(b)(1)(iii) – How the final cover system will achieve the performance standards in §257.102(d).</p> <p>Five Performance Standards:</p>	
<p>1. (d)(1)(i) – Control, minimize or eliminate, to the maximum extent feasible, post-closure infiltration of liquids into the waste and releases of CCR, leachate, or contaminated run-off to the ground or surface waters or to the atmosphere.</p>	<p>The infiltration (flux) through the final cover will be demonstrated to be equivalent to a cover system that includes a geomembrane. The demonstration of the alternative final cover system will be completed during final engineering design for the grading and cover system and issued in an amended closure plan.</p>

<p>2. (d)(1)(ii) – Preclude the probability of future impoundment of water, sediment, or slurry.</p>	<p>The final cover will be installed with a minimum as-constructed top slope of 0.5 percent to preclude the probability of ponding. The final cover will generally slope from thickest to thinnest deposited CCR; the final design for the final cover system will consider the magnitude of the expected settlement of the wastes and the potential and locations of possible differential settlement. The post-closure plan includes maintenance measures to correct local grading deficiencies.</p>
<p>3. (d)(1)(iii) – Include measures that provide for major slope stability to prevent the sloughing or movement of the final cover system during the closure and post-closure care period.</p>	<p>The outer slopes of the final closed configuration of the LDWP will be re-graded to an approximate slope of 4H:1V, or flatter where applicable. The final engineering design for the grading and cover system will include geotechnical analyses to demonstrate that the final outer slopes and cover will satisfy the stability requirements to prevent sloughing or mass movement.</p>
<p>4. (d)(1)(iv) – Minimize the need for further maintenance of the CCR unit.</p>	<p>The final cover will be seeded with native vegetation to minimize erosion maintenance. Drainage channels will have appropriate erosion protection measure to minimize erosion maintenance.</p>
<p>5. (d)(1)(v) – Be completed in the shortest amount of time consistent with recognized and generally accepted good engineering practices.</p>	<p>Phased or partial closure of the LDWP is not considered technically feasible or efficient. Closure is projected to take greater than 5 years to complete.</p> <p>The closure of the LDWP will require dewatering and stabilization of the ash materials sufficient for construction of the grading and final cover. These activities will be performed concurrently with the complete closure of the LAI and the partial closure of one or more cells comprising the DFADA.</p> <p>Although the LDWP is smaller than the LAI and could otherwise be closed in less time, the</p>

	<p>interconnectedness of the two units necessitates the LDWP follow the LAI closure schedule.</p> <p>Therefore, dewatering and stabilization would not be complete until approximately 4 to 5 years after closure begins and construction of the grading and final cover with appurtenant drainage features may take an additional 4 years. Therefore, closure is expected to take a total of 9 years to complete.</p>
<p>(d)(2)(i) – Free liquids must be eliminated by removing liquid wastes or solidifying the remaining wastes and waste residues.</p>	<p>The unit will be sufficiently dewatered to remove the free liquids to provide a stable base for the construction of the final cover system.</p>
<p>(d)(2)(ii) – Remaining wastes must be stabilized sufficiently to support the final cover system.</p>	<p>The existing (in-place) CCR will be sufficiently dewatered and re-graded so as to provide a stable base for the final cover. The two existing HDPE geomembranes will be removed from the LDWP embankments, but remain along the current base and be covered with the evapotranspiration cap.</p>
<p>(d)(3) – A final cover system must be installed to minimize infiltration and erosion, and at minimum, meets the requirements of (d)(3)(i) of this section, or the requirements of the alternative final cover system specified in paragraph (d)(3)(ii) of this section.</p> <p>(d)(3)(i) – The design of the final cover system must be included in the written closure plan.</p>	<p>The alternative final cover system will meet the requirements of §257.102(d)(3)(ii). The requirements of §257.102(d)(3)(ii) will be achieved using the clayey and silty soils present at the site to promote runoff and evapotranspiration. The infiltration layer will be a minimum of 18 inches thick and will be constructed to reduce infiltration or flux into the LDWP. The rocky on-site soils or an off-site aggregate source will be used to provide an erosion layer to protect the infiltration layer. When the engineering design for the final cover system is completed, it will be issued in an amended closure plan.</p>
<p>EITHER</p> <p>(d)(3)(i)(A) – The permeability of the final cover system must be less than or equal to the permeability of any bottom liner system or natural subsoils present, or a permeability no greater than 1×10^{-5} cm/sec, whichever is less.</p> <p>(d)(3)(i)(B) – The infiltration of liquids through the closed CCR unit must be minimized by the use of</p>	<p>The alternative final cover system will meet the requirements of §257.102(d)(3)(ii). The permeability of the final cover will be demonstrated prior to closure.</p>

<p>an infiltration layer than contains a minimum of 18 inches of earthen material.</p> <p>OR</p> <p>(d)(3)(ii)(A) – The design of the final cover system must include an infiltration layer that achieves an equivalent reduction in infiltration as the infiltration layer specified in paragraphs (d)(3)(i)(A) and (B).</p>	
<p>EITHER</p> <p>(d)(3)(i)(C) – The erosion of the final cover system must be minimized by the use of an erosion layer that contains a minimum of six inches of earthen material that is capable of sustaining native plant growth.</p> <p>OR</p> <p>(d)(3)(ii)(B) – The design of the final cover system must include an erosion layer that provides equivalent protection from wind or water erosion as the erosion layer specified in paragraph (d)(3)(i)(C) of this section.</p>	<p>The final cover will include either of the following:</p> <ol style="list-style-type: none"> 1) a minimum of 6 inches of a soil erosion layer that is capable of sustaining native plant growth (erosion layer) that will be seeded and vegetated to meet the requirements of §257.102(d)(3)(i)(C); or 2) a minimum of 6 inches of rock armor erosion protection to meet the requirements of §257.102(d)(3)(ii)(B).
<p>(d)(3)(i)(D), (d)(3)(ii)(C) – The disruption of the integrity of the final cover system must be minimized through a design that accommodates settling and subsidence.</p>	<p>The engineering design for the final cover system will consider the magnitude of the expected settlement of the wastes and the potential and locations of possible differential settlement.</p> <p>The final cover will incorporate an 18-inch thick, loosely-compacted evapotranspiration layer that will behave in a flexible manner so as to minimize the risk of disrupting the continuity of the cap due to settlement.</p>

INVENTORY AND AREA ESTIMATES	
(b)(1)(iv) An estimate of the maximum inventory of CCR ever on-site over the active life of the CCR unit.	This pond is not intended as a CCR solid storage impoundment, but rather as an integral part of the LAI function. It is assumed to have CCR sediment up to 3 inches deep throughout the pond, or approximately 18,150 cubic yards.
(b)(1)(v) – An estimate of the largest area of the CCR unit ever requiring a final cover as required by paragraph (d) of this section at any time during the CCR unit’s active life.	45 acres
CLOSURE SCHEDULE	
(b)(1)(vi) – A schedule for completing all activities necessary to satisfy the closure criteria in this section, including an estimate of the year in which all closure activities for the CCR unit will be completed. The schedule should provide sufficient information to describe the sequential steps/milestones that will be taken to close the CCR unit, and the estimated timeframes to complete each step or phase of CCR unit closure. If closure timeframe is anticipated to exceed the timeframes specified in paragraph §257.102(f)(1) of this section, the written closure plan must include the site-specific information, factors and considerations that would support any time extension sought under paragraph §257.102(f)(2).	
The milestone and the associated timeframes are initial estimates. Some of the activities associated with the milestones will overlap. Amendments to the milestones and timeframes will be made as more information becomes available.	
Initial Written Closure Plan Completed	By October 17, 2016
Receipt of Final Waste	August 2019 (estimated)
Permits and Approvals from Agencies	July 2019
Closure Activities Initiated	September 2019
Complete Dewatering	December 2021
Complete Stabilization of CCR	December 2024
Installation of Final Cover	August 2028
Estimated Completion of Closure Activities	September 2028 (estimated 9-year closure completion schedule concurrent with the LAI)

Certification Statement 40 CFR § 257.102(b)(4) – Initial Written Closure Plan for a CCR Surface Impoundment

CCR Unit: Arizona Public Service; Four Corners Power Plant; Lined Decant Water Pond


I, Alexander W. Gourlay, being a Registered Professional Engineer in good standing in the State of New Mexico, do hereby certify, to the best of my knowledge, information, and belief, that the information contained in this certification has been prepared in accordance with the accepted practice of engineering. I certify, for the above-referenced CCR Unit, that the information contained in the initial written closure plan dated October 17, 2016 meets the requirements of 40 CFR § 257.102.

Alexander W. Gourlay, P.E.

Printed Name

August 30, 2016

Date

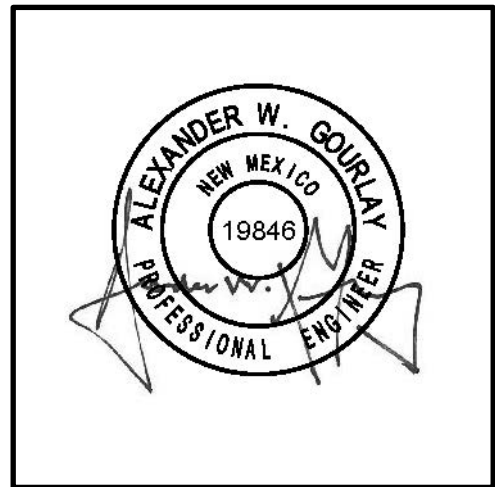

Certification Statement 40 CFR § 257.102(d)(3)(iii) – Design of the Final Cover System for Closure of a CCR Surface Impoundment

CCR Unit: Arizona Public Service, Four Corners Power Plant; Lined Decant Water Pond


I, Alexander W. Gourlay, being a Registered Professional Engineer in good standing in the State of New Mexico, do hereby certify, to the best of my knowledge, information, and belief, that the information contained in this certification has been prepared in accordance with the accepted practice of engineering. I certify, for the above-referenced CCR Unit, that the design of the final cover system as included in the design statement dated October 17, 2016 meets the requirements of 40 CFR § 257.102.


Alexander W. Gourlay, P.E.

Printed Name


August 30, 2016

Date

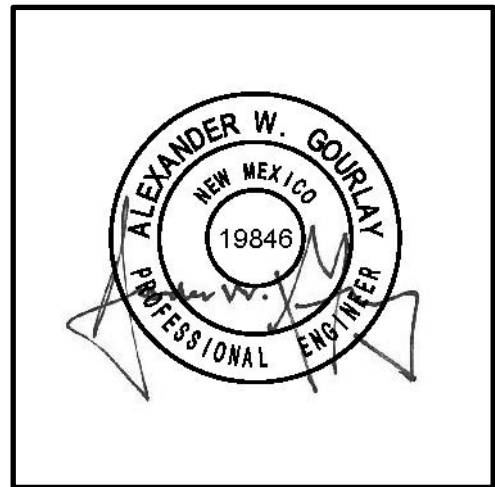


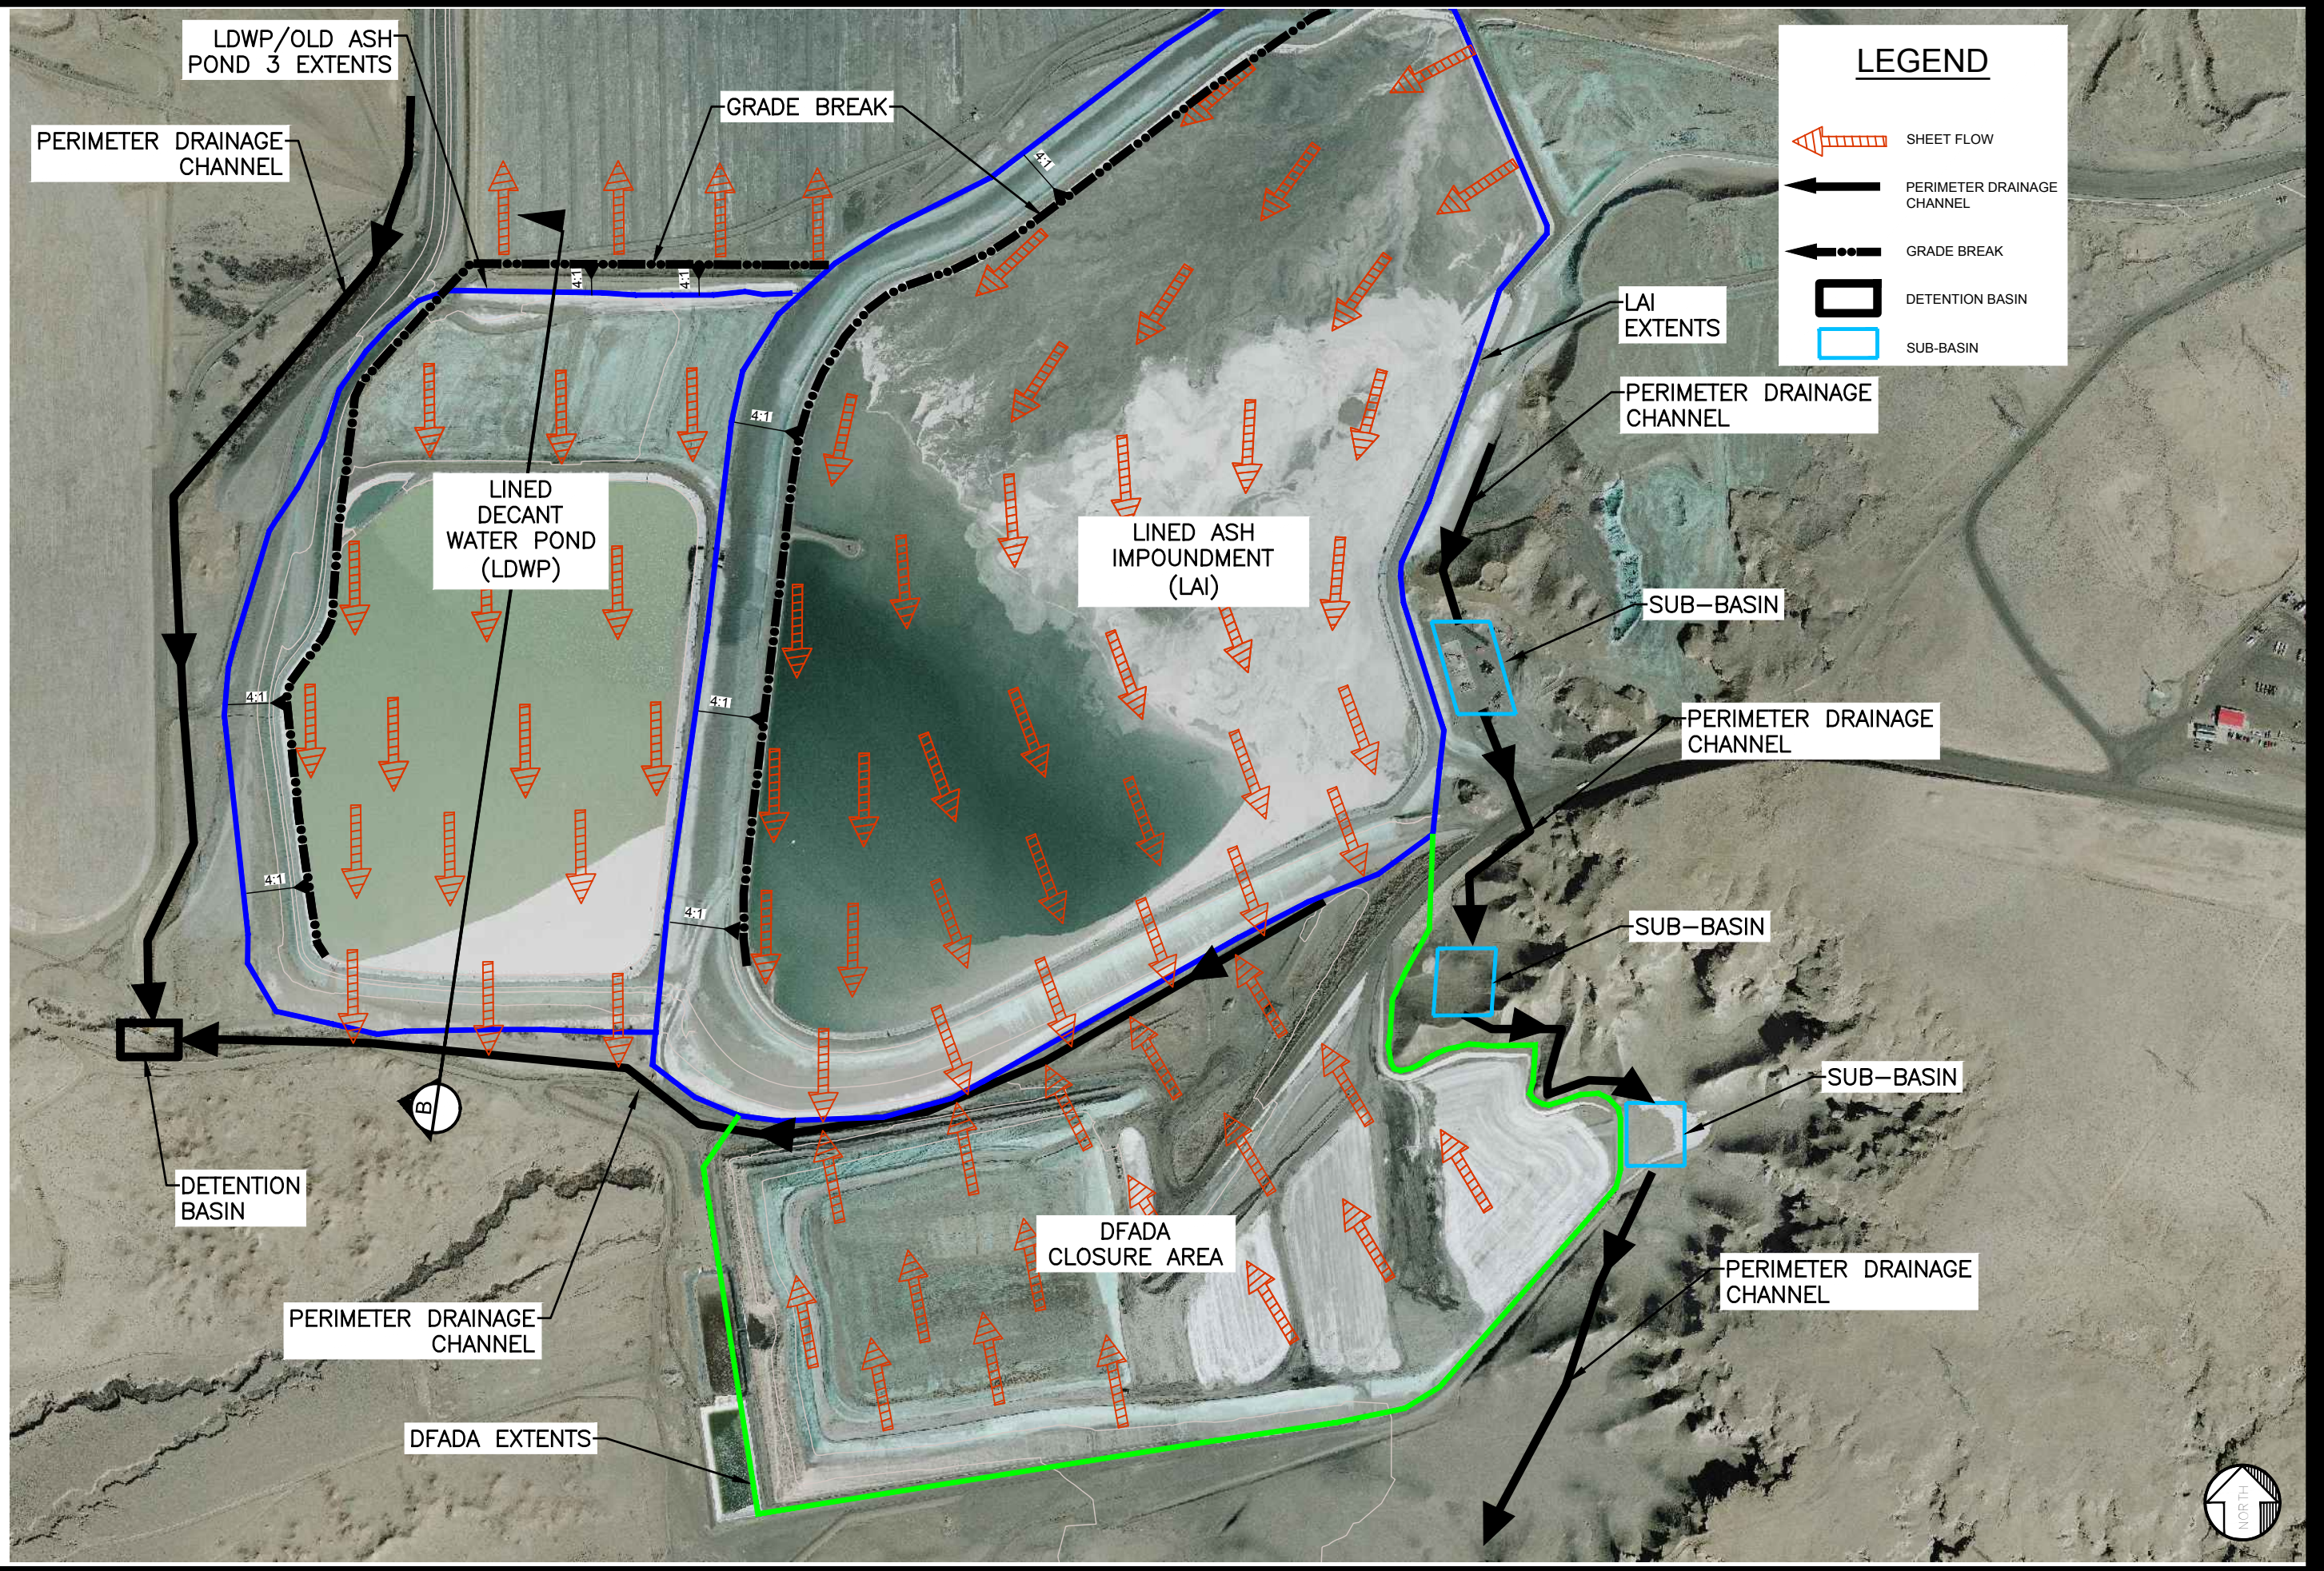


Approved: AWG Checked: JBH Designer: GP Project Management Initials: Last saved by: LEE_WRIGHT(2016-06-30) Last Plotted: 2016-08-30 File name: P:\PROJECTS\ARIZONA_PUBLIC_SERVICE\60492608_FCPP_CCR_REPORTS\4_CADD_GIS\FIGURES\A21320-FINAL.DWG

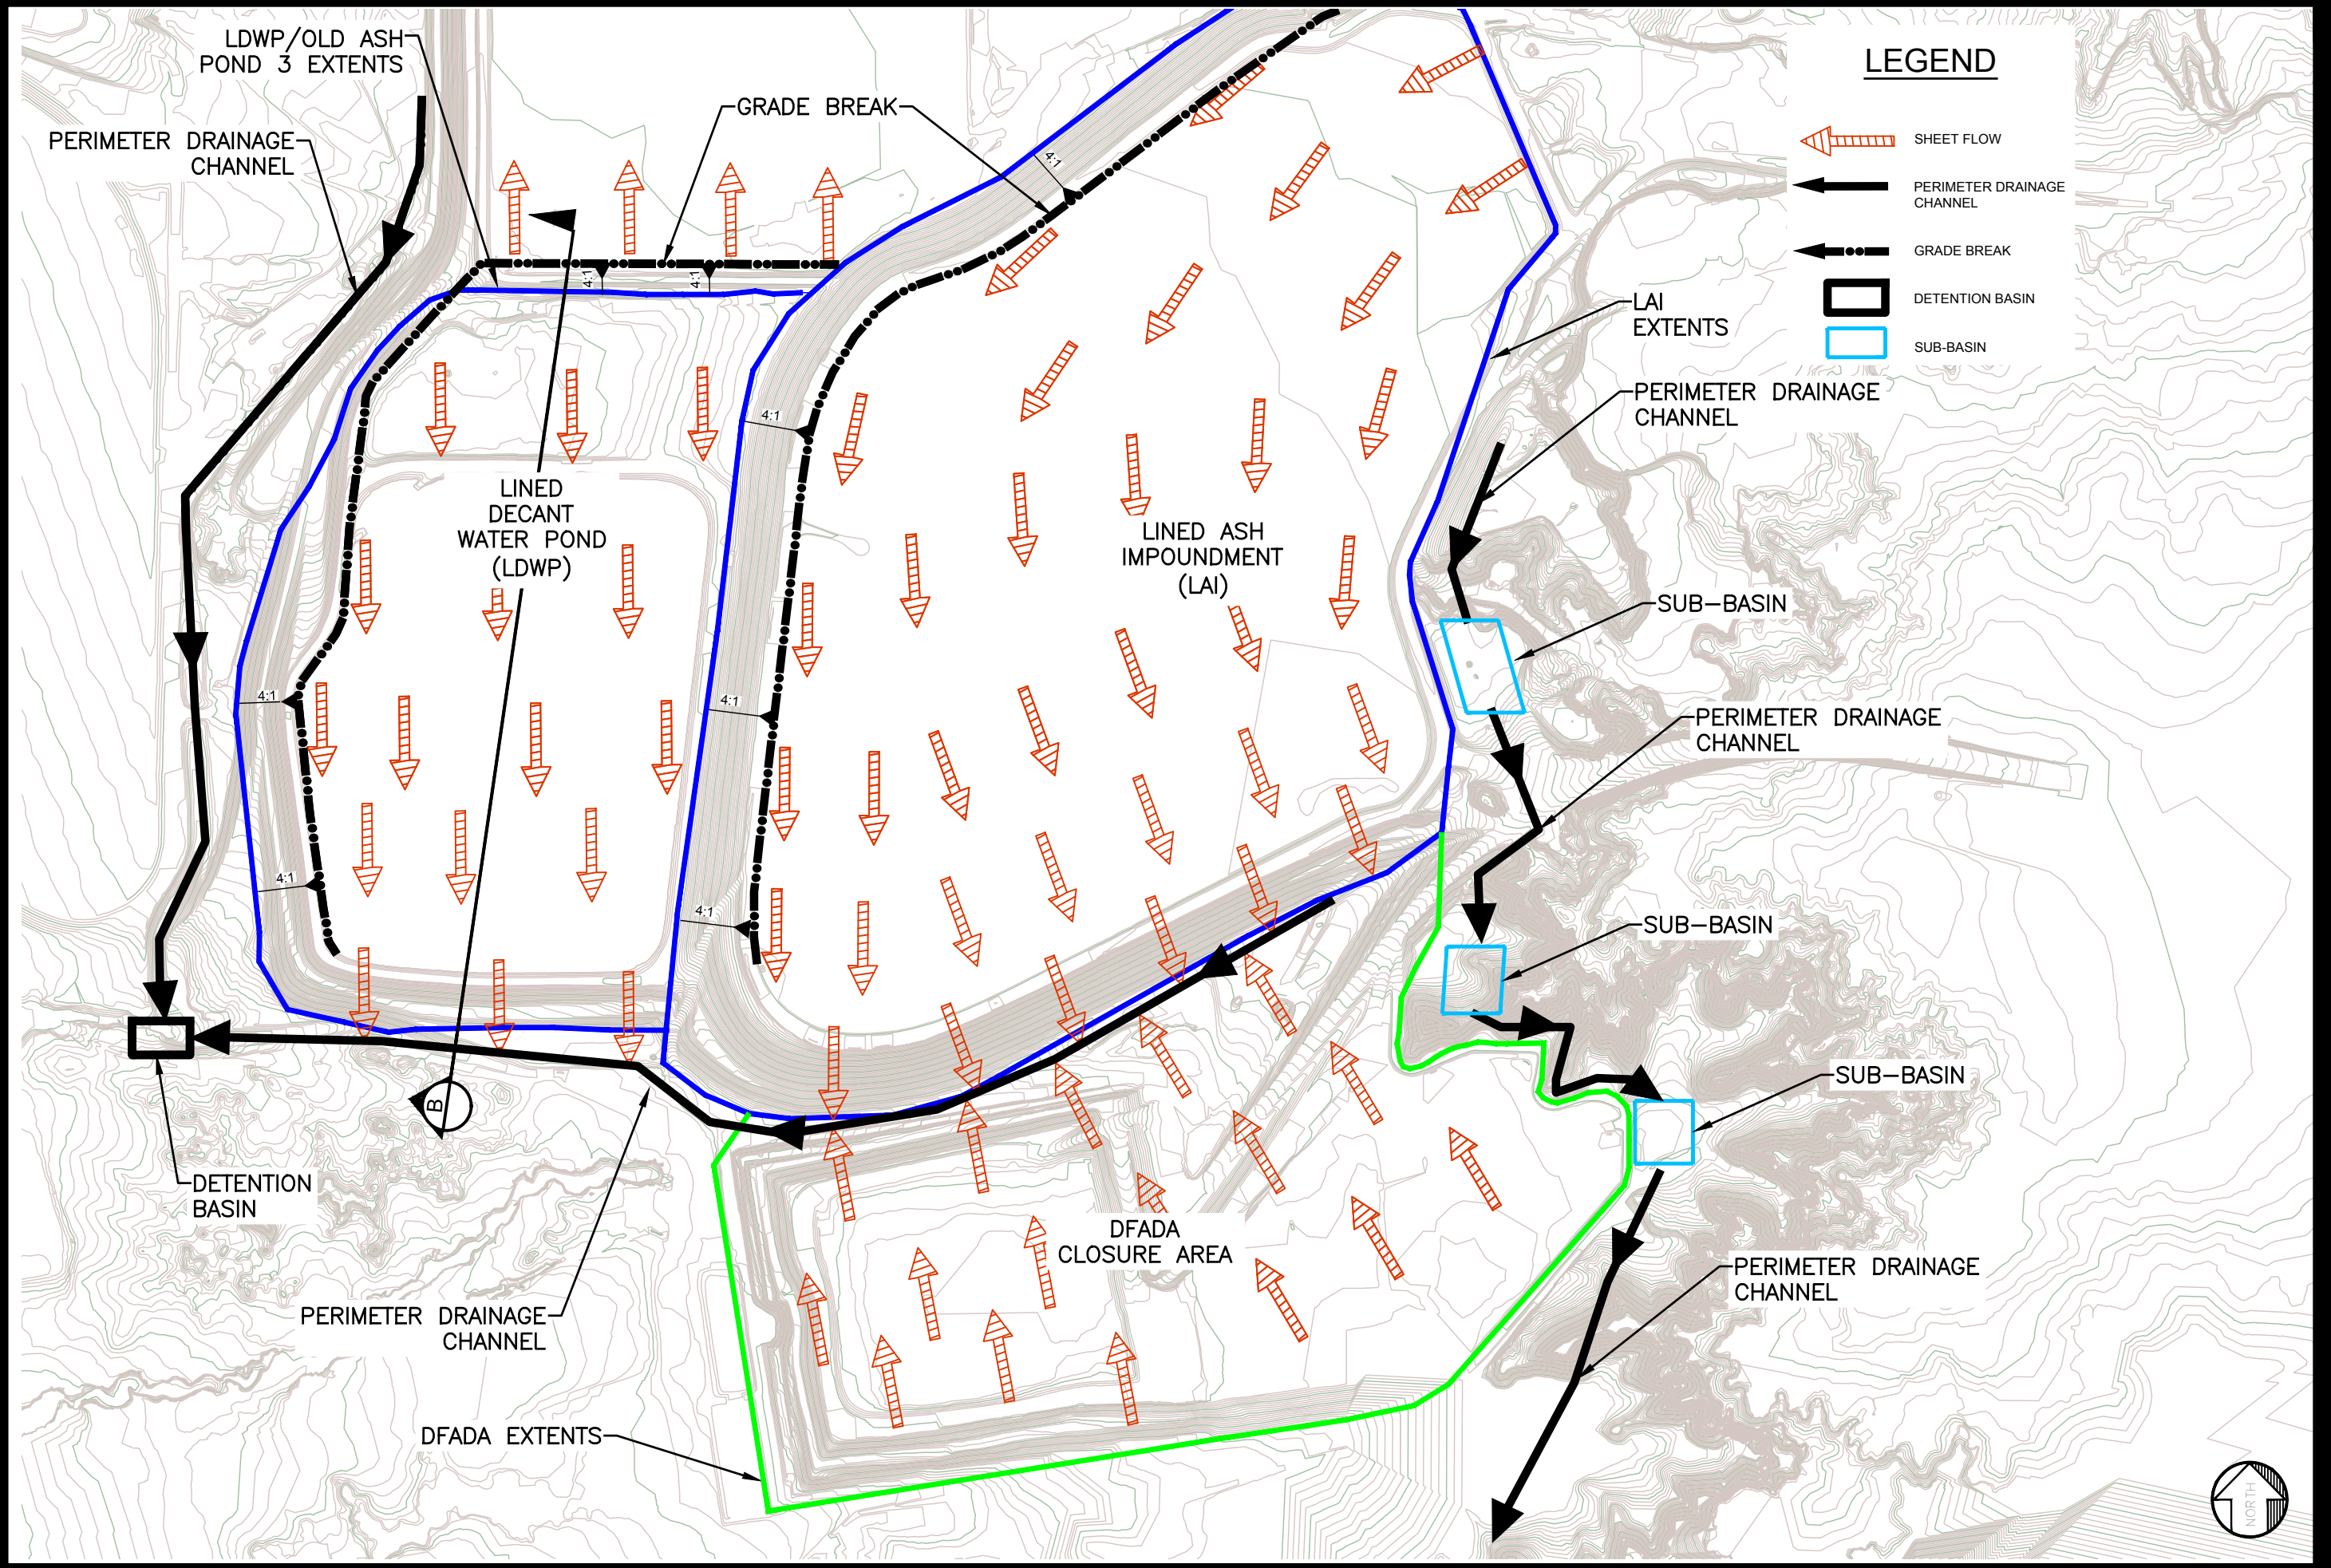

LEGEND

- SHEET FLOW
- PERIMETER DRAINAGE CHANNEL
- GRADE BREAK
- DETENTION BASIN
- SUB-BASIN

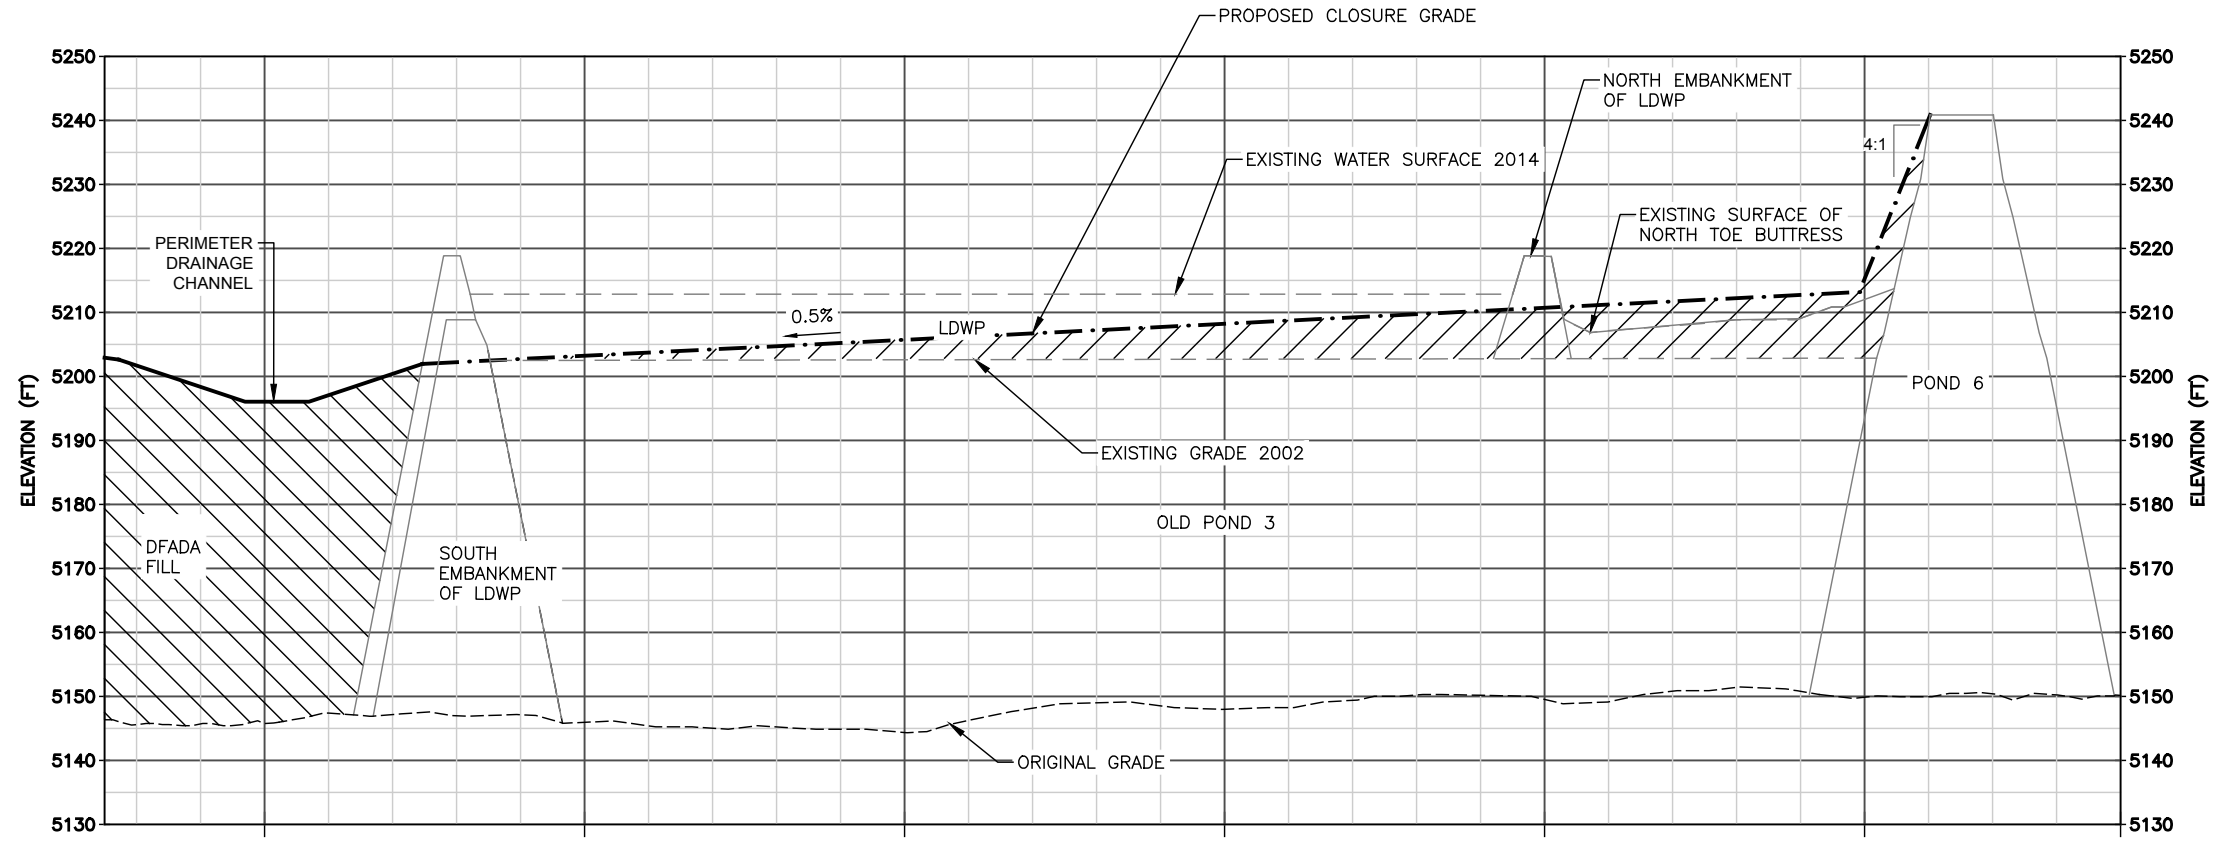

Four Corners LDWP Closure
Profile View